

The next Generation **Dynamelt™ S**

THE NEXT GENERATION DYNAMELT™ S FEATURES A MODULAR DESIGN THAT MAKES IT SIMPLE TO INSTALL, OPERATE AND MAINTAIN. UNIQUE DESIGN AND PERFORMANCE FEATURES SET IT APART FROM THE COMPETITION, MINIMIZING DOWNTIME AND OFFERING GREATER FLEXIBILITY.

FLEXIBILITY

A compact footprint, ergonomic design, and corner mounted hose connections make this the most versatile, user-friendly melter on the market today.

RELIABILITY

Melt-On-Demand technology, 15 times more filtration area and isolated electronics make this one of the most reliable melters on the market today.

SAFETY

A lock-out-tag-out main power switch, insulated manifold cover and “finger-safe” electronics maintain safety during both production and maintenance.



THE NEXT GENERATION **DYNAMELT™ S SERIES** ADHESIVE SUPPLY UNIT

The next generation Dynamelt™ S defines a new standard of innovation in the industry. With intuitive controls and a modular design that make it simple to install, operate and maintain, the Dynamelt™ S is the go-to choice for manufacturers worldwide. Unique design and performance features set it apart from the competition, minimizing downtime and offering greater flexibility. Designed to be used in conjunction with the Dynatec family of equipment for maximum efficiency and performance, this virtually “invisible” system will remain in sight but out of mind in your facility. It consumes 20 % less energy and significantly less air than similar units while advanced diagnostics, quick-change components and a larger filtration surface significantly reduce maintenance cycles and required labor.

FEATURES

- Intuitive, easy to read display is repositionable to front or side of unit and shows all system parameters at a glance.
- Consumes up to 20 % less energy and significantly less air than similar competitive units, reducing operating costs.
- New Nano ceramic hopper coating is 5 times more durable than competitive PTFE coatings to withstand wear.
- Replace modular electronics, filters and pumps easily with new simplified procedures.

TECHNICAL DATA

System	S05	S10
Hopper Capacity *	5 kg (10 lbs)	10 kg (22 lbs)
Weight	59kg (129 lbs)	63kg (138 lbs)
Operating temperature range	10° to 218 °C (50° to 425 °F)	
Viscosity range	500 to 50,000 mPas/cps	
Melt rate **	10 kg/hr (23 lb/hr)	
Gear pump sizes	1,5 / 3,2 / 4,5 ccm/rev	
Piston pump rate	0.91 kg/min (2 lbs/min)	
Piston pump compression ratio	12:1	
Hose/Head output zones	2, 4 or 6	
Max. working hydraulic pressure	68 bar (1,000 psi)	
Supply voltage setup 1	240V 1Phase Δ 50/60Hz, 240V 3Phase Δ 50/60Hz	
Supply voltage setup 2	380V 3Ph Y 50/60Hz	
Height	533 mm (20.96 in)	661 mm (26 in)
Depth	427 mm (16.8 in)	427 mm (16.8 in)
Width	655 mm (25.79 in)	655 mm (25.79 in)


* No optional grid mounted, ** Melt rates vary with adhesive type

OPTIONS

- Analog or digital pressure gauge
- Adhesive Low Level Sensor
- Tethered pendant controller display
- 480 VAC transformer
- Drop-in heating grid (S10 only)
- Ethernet module

MELT-ON-DEMAND HOPPER

Adhesive degradation is recognized as the number one cause of downtime on hot melt equipment. To address this problem, ITW Dynatec has patented a “Melt-On-Demand” system. ITW Dynatec’s vertical, unheated hoppers only melt the amount of adhesive required by the application. Most of the hot melt adhesive in the hopper remains at a much lower temperature, perhaps even solid state. The added benefits of melting only the adhesive required are quicker start-ups, reduced energy costs, better viscosity control, and reduced fumes.

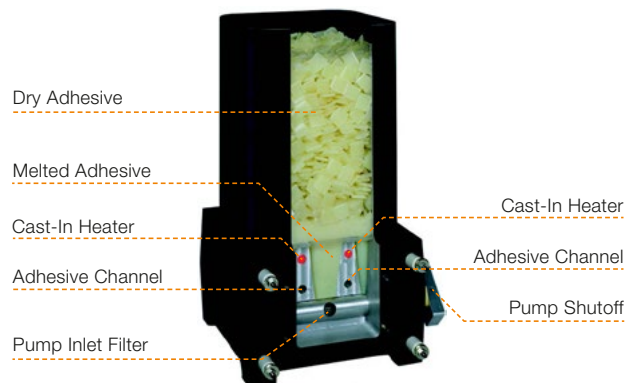

LOCATIONS

Americas
ITW Dynatec
31 Volunteers Drive
Hendersonville, TN 37075
Phone: +1.615.824.3634
Fax: +1.615.264.5248
info@itwdynatec.com
www.itwdynatec.com

China
ITW Dynatec Suzhou
Unit 2, B1 Building
No. 9 Weixin Road
SIP, Suzhou, China 215122
Phone +86.512.6289.0620
Fax +86.512.6289.0621
info@itwdynatec.cn
www.itwdynatec.cn

Japan
ITW Dynatec K.K.
Flos Kamata
26-11, Nishikamata 7-chome
Ota-ku, Tokyo 144-0051, Japan
Phone: +81.3.5703.5501
Fax: +81.3.5703.5505
info@itwdynatec.co.jp
www.jp.itwdynatec.com

**Europe, Middle East
and Africa**
ITW Dynatec GmbH
Industriestraße 28
40822 Mettmann, Germany
Phone: +49.2104.915.0
Fax: +49.2104.915.111
info@itwdynatec.de
www.itwdynatec.de

France
ITW Dynatec Tenplus
ZI Croix de Raville
28500 Chérisy, France
Phone: +33.237.6256.47
Fax: +33.237.6256.40
info@itwdynatec.fr
www.itwdynatec.fr



ISO 9001
REGISTERED FIRM